

Fig. 3


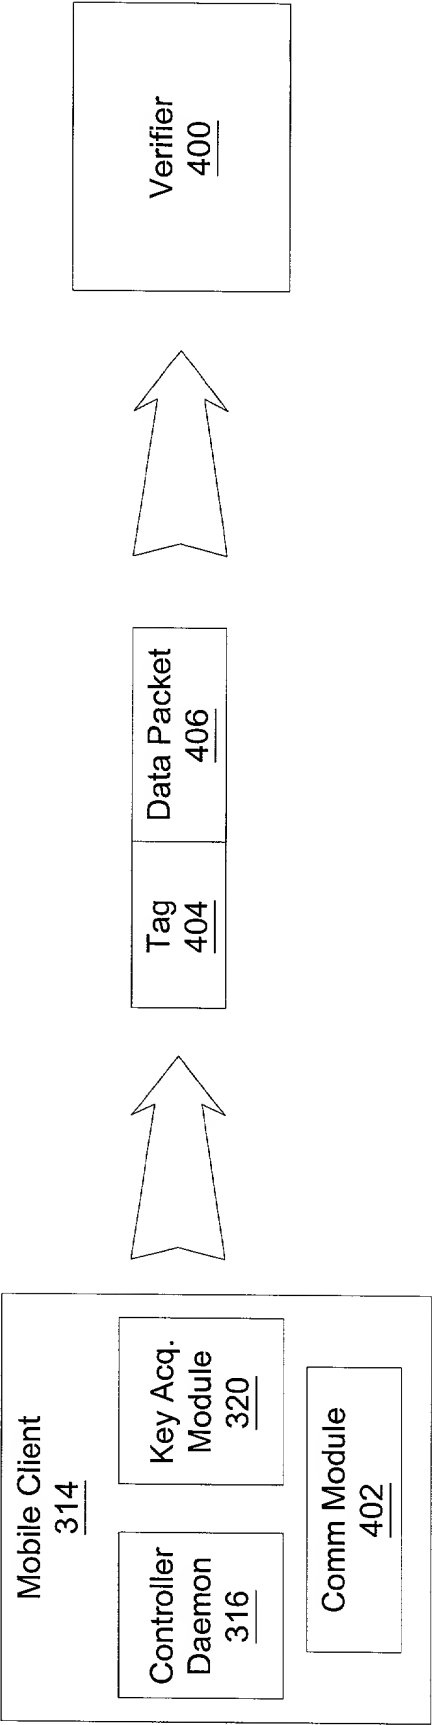


Fig. 4

Network ID <u>502</u>	Subnet Mask <u>508</u>	Authorizer Address <u>504</u>	Verifier Address <u>506</u>	Website URL <u>510</u>
--------------------------	---------------------------	-------------------------------------	--------------------------------	---------------------------

Extended Announcer Signal
500

Fig. 5

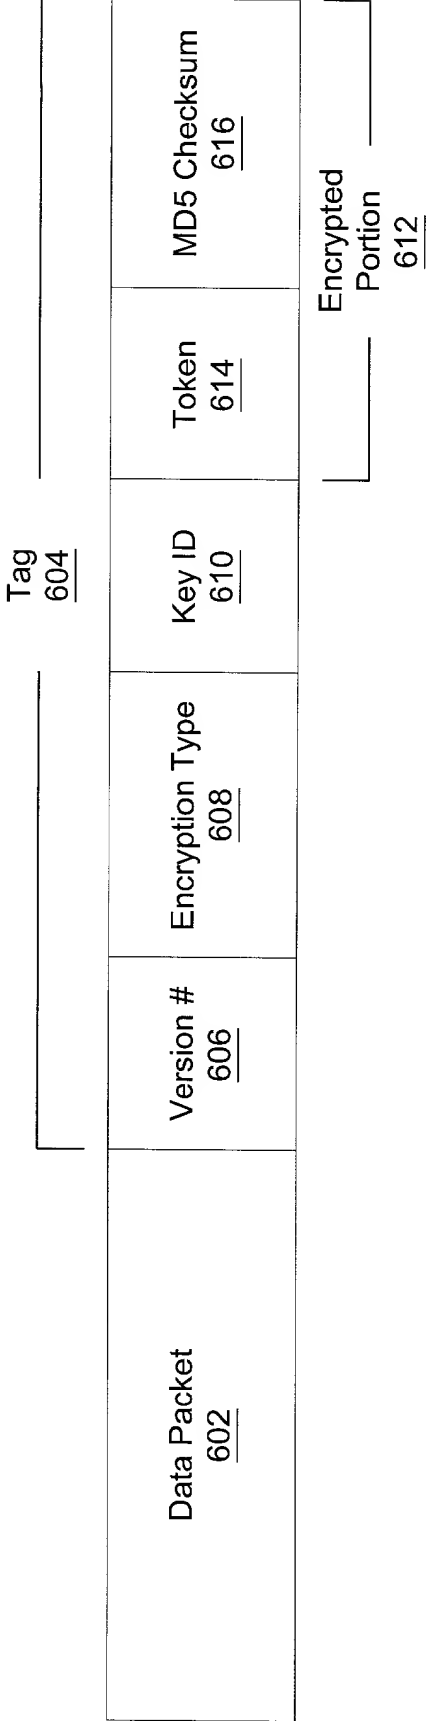

Tagged Data Packet
600

Fig. 6

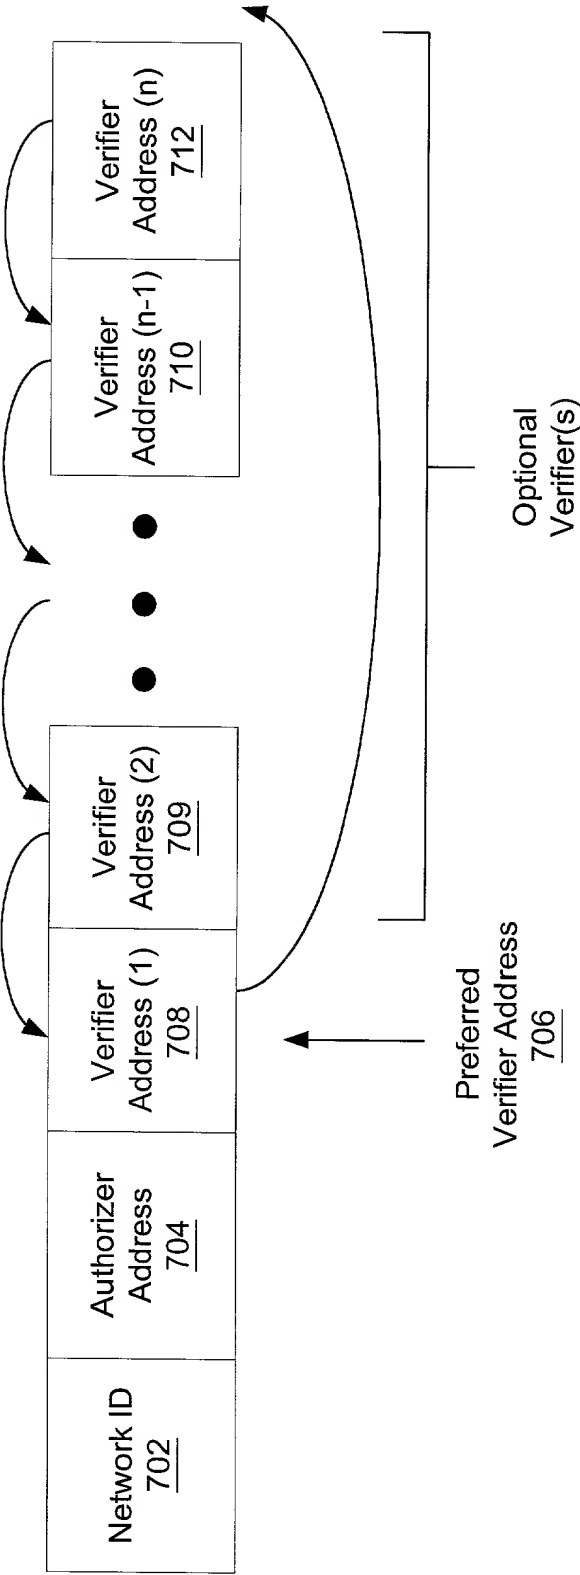


Fig. 7
Announcer Signal With
Load Balancing Feature
700


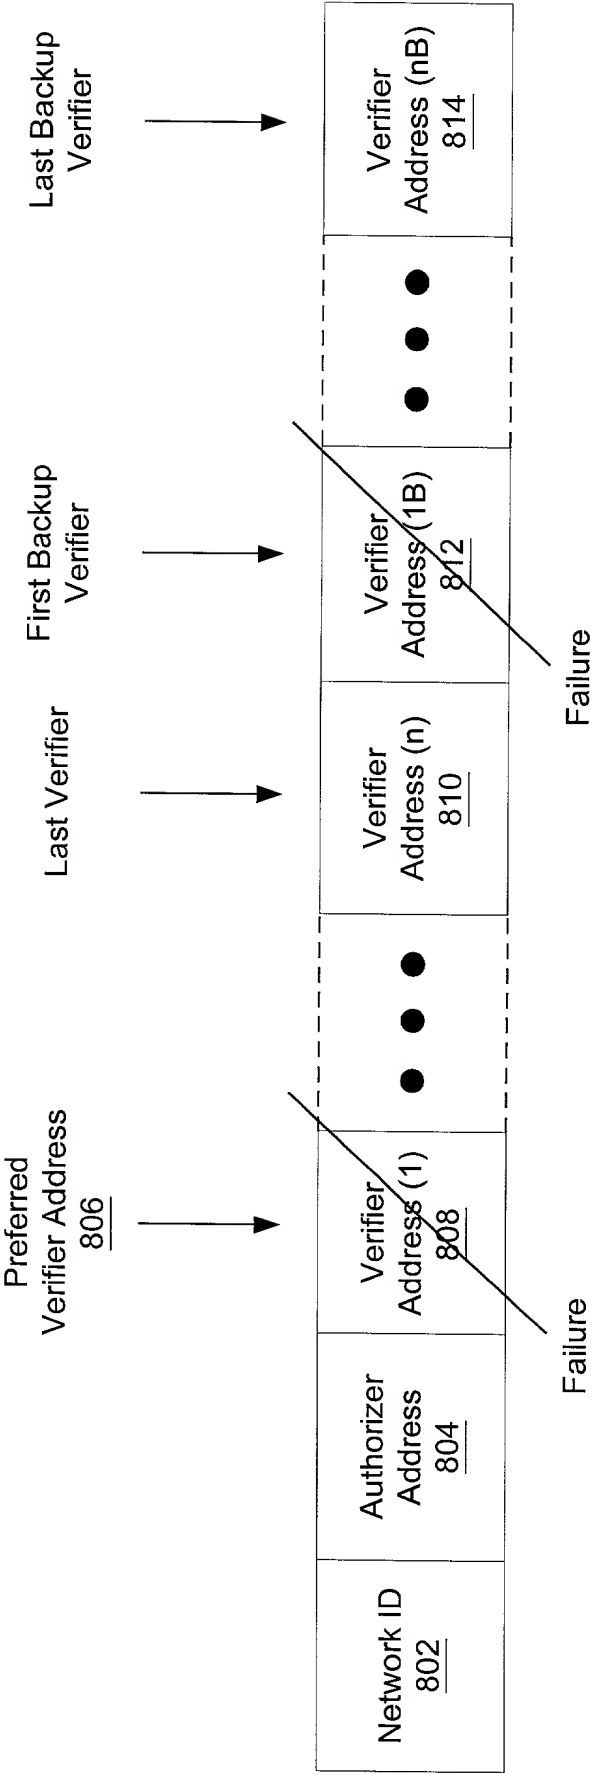


Fig. 8

Announcer Signal
800

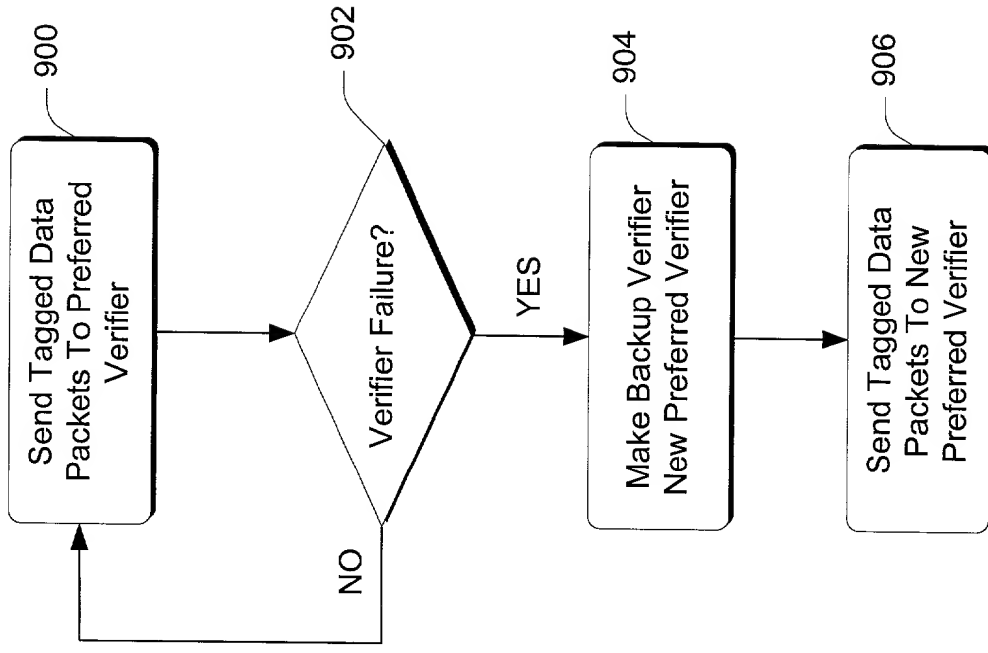

FAULT TOLERANCE

Fig. 9

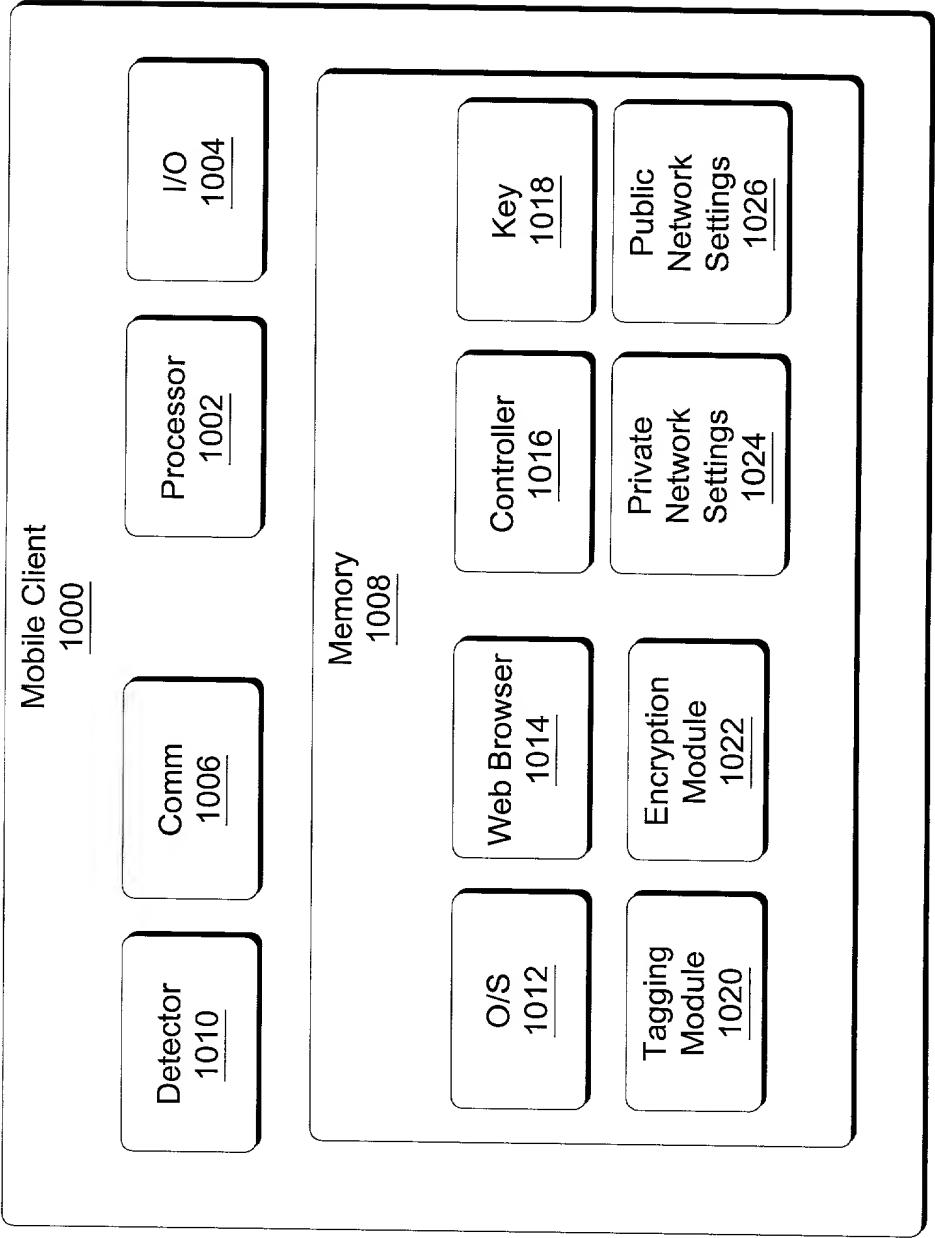


Fig. 10

Fig. 11

ROAMING